

**Features**

- Uses CRM(CQ) advanced SkyMOS3 technology
- Extremely low on-resistance  $R_{DS(on)}$
- Excellent  $Q_g \times R_{DS(on)}$  product(FOM)
- Qualified according to JEDEC criteria


**Applications**

- Motor control and drive
- Battery management System
- UPS (Uninterruptible Power Supplies)

**Product Summary**

$V_{DS}$	150V
$R_{DS(on),typ}$	4.2mΩ
$I_D$	160A

**100% DVDS Tested**  
**100% Avalanche Tested**

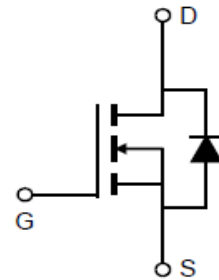
**Package Marking and Ordering Information**

Part #	Marking	Package	Packing	Reel Size	Tape Width	Qty
CRSQ052N15N3Z	CRSQ052N15N3Z	TO-247	Tube	N/A	N/A	30pcs

**Absolute Maximum Ratings**

Parameter	Symbol	Value	Unit
Drain-source voltage	$V_{DS}$	150	V
Continuous drain current	$I_D$	190	A
$T_C = 25^\circ\text{C}$ (Silicon limit)		160	
$T_C = 25^\circ\text{C}$ (Package limit)		119	
$T_C = 100^\circ\text{C}$ (Silicon limit)			
Pulsed drain current ( $T_C = 25^\circ\text{C}$ , $t_p$ limited by $T_{jmax}$ )	$I_{D\ pulse}$	640	A
Avalanche energy, single pulse ( $I_D = 70\text{A}$ , $R_g = 25\Omega$ ) <sup>[1]</sup>	$E_{AS}$	1225	mJ
Gate-Source voltage	$V_{GS}$	±20	V
Power dissipation ( $T_C = 25^\circ\text{C}$ )	$P_{tot}$	310	W
Operating junction and storage temperature	$T_j, T_{stg}$	-55...+150	°C
Soldering temperature, wave soldering only allowed at leads (1.6mm from case for 10s)	$T_{sold}$	260	°C

※. Notes:

 1.EAS is tested at starting  $T_j = 25^\circ\text{C}$ ,  $L = 0.5\text{mH}$ ,  $I_{AS} = 70\text{A}$ ,  $V_{GS} = 10\text{V}$ .

**Thermal Resistance**

Parameter	Symbol	Max	Unit
Thermal resistance, junction – case.	$R_{thJC}$	0.40	°C/W
Thermal resistance, junction – ambient(min. footprint)	$R_{thJA}$	62	

**Electrical Characteristic (at  $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified)**

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		

**Static Characteristic**

Drain-source breakdown voltage	$BV_{DSS}$	150	-	-	V	$V_{GS}=0V, I_D=250\mu A$
		150	-	-	V	$V_{GS}=0V, I_D=1mA$
Gate threshold voltage	$V_{GS(th)}$	2.0	3.0	4.0	V	$V_{DS}=V_{GS}, I_D=250\mu A$
Zero gate voltage drain current	$I_{DSS}$	-	-	1	$\mu A$	$V_{DS}=150V, V_{GS}=0V$ $T_j=25^\circ C$ $T_j=125^\circ C$
Gate-source leakage current	$I_{GSS}$	-	-	$\pm 100$	nA	$V_{GS}=\pm 20V, V_{DS}=0V$
Drain-source on-state resistance	$R_{DS(on)}$		4.2	5.2	mΩ	$V_{GS}=10V, I_D=60A$
Transconductance	$g_{fs}$	53.0	106.0	212.0	S	$V_{DS}=5V, I_D=60A$

**Dynamic Characteristic**

Input Capacitance	$C_{iss}$	3762	5643	8464	pF	$V_{GS}=0V, V_{DS}=75V,$ $f=1MHz$
Output Capacitance	$C_{oss}$	534	802	1203		
Reverse Transfer Capacitance	$C_{rss}$	15	29	58		
Gate Total Charge	$Q_G$	51.9	77.9	116.8	nC	$V_{GS}=10V, V_{DS}=75V,$ $I_D=60A$
Gate-Source charge	$Q_{gs}$	22.8	34.2	51.2		
Gate-Drain charge	$Q_{gd}$	7.7	15.3	30.6		
Turn-on delay time	$t_{d(on)}$	11.3	22.5	45.1	ns	$V_{GS}=10V, V_{DD}=75V,$ $R_{G\_ext}=2.7\Omega$
Rise time	$t_r$	71.9	107.8	161.7		
Turn-off delay time	$t_{d(off)}$	36.6	54.9	82.3		
Fall time	$t_f$	70.4	105.7	158.5		
Gate resistance	$R_G$	2.0	3.7	6.0	Ω	$V_{GS}=0V, V_{DS}=0V,$ $f=1MHz$

**Body Diode Characteristic**

Parameter	Symbol	Value			Unit	Test Condition
		min.	typ.	max.		
Body Diode Forward Voltage	$V_{SD}$	-	0.89	1.4	V	$V_{GS}=0V, I_{SD}=60A$
Body Diode Reverse Recovery Time	$t_{rr}$	51.3	102.6	205.2	ns	$I_F=60A, dI/dt=100A/\mu s$
Body Diode Reverse Recovery Charge	$Q_{rr}$	146.7	293.4	586.7	nC	

### Typical Performance Characteristics

Fig 1: Output Characteristics

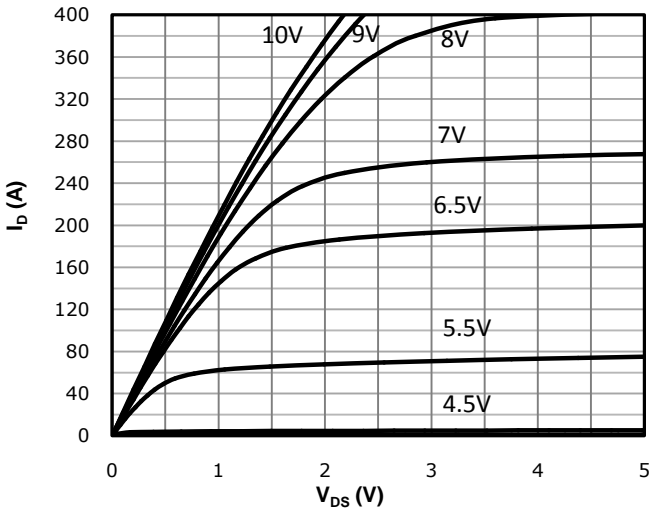


Fig 2: Transfer Characteristics

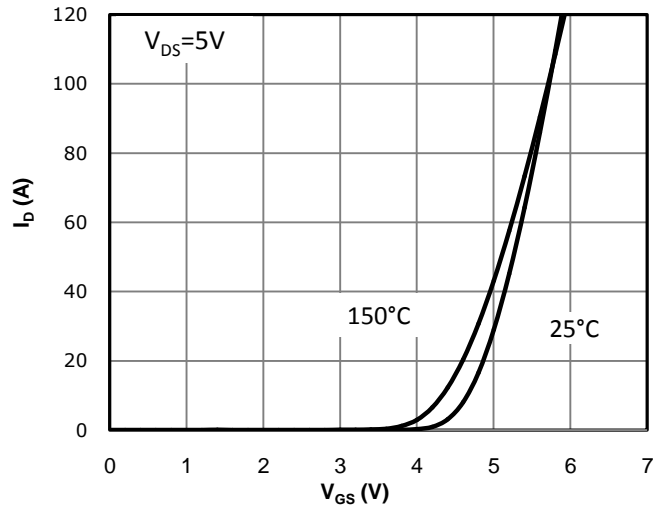


Fig 3:  $R_{DS(on)}$  vs Drain Current and Gate Voltage

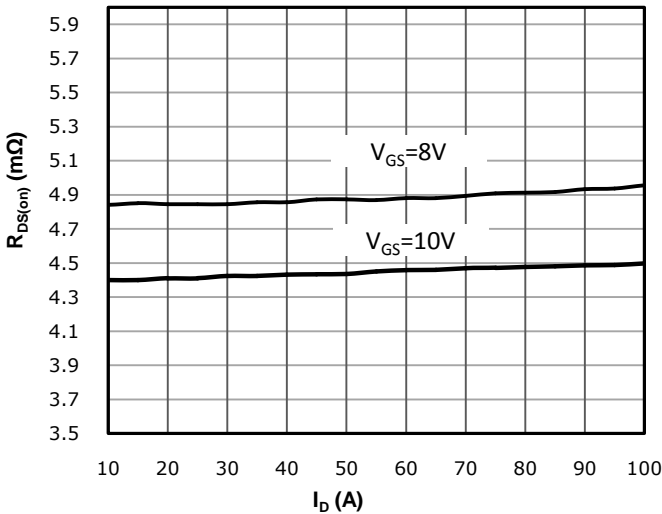


Fig 4:  $R_{DS(on)}$  vs Gate Voltage

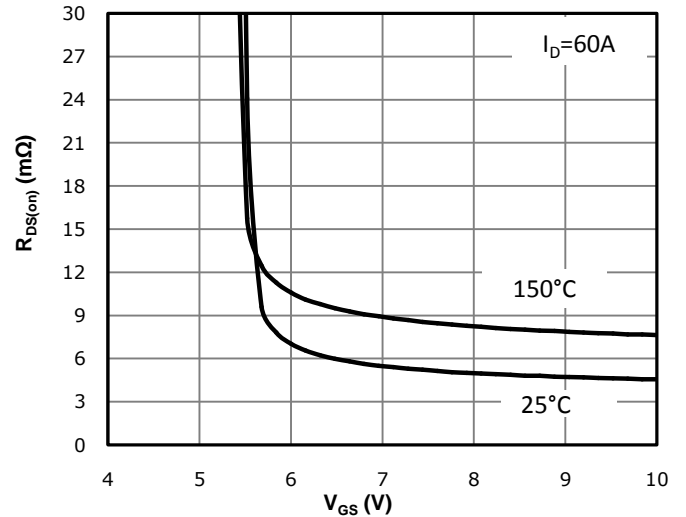


Fig 5:  $R_{DS(on)}$  vs. Temperature

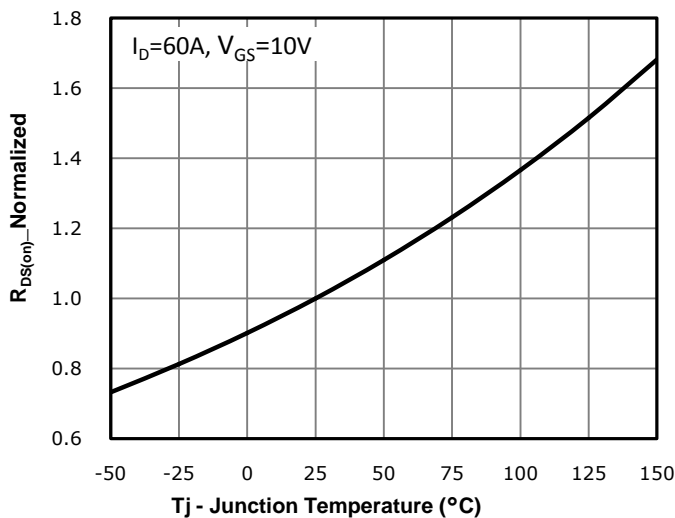


Fig 6:  $V_{GS(th)}$  vs. Temperature

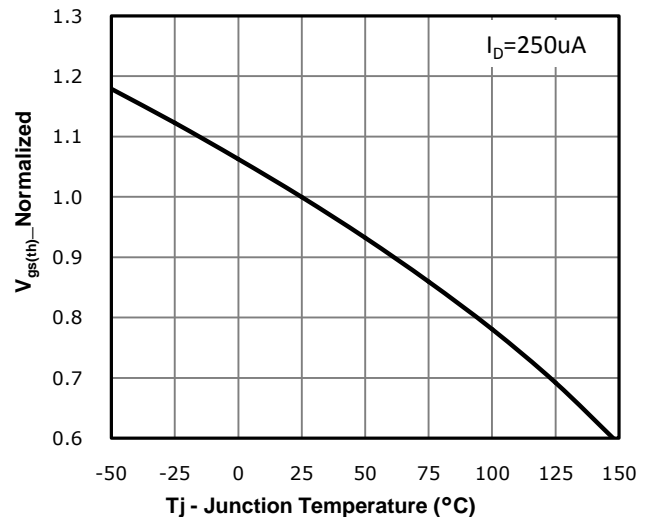


Fig 7: BVdss vs. Temperature

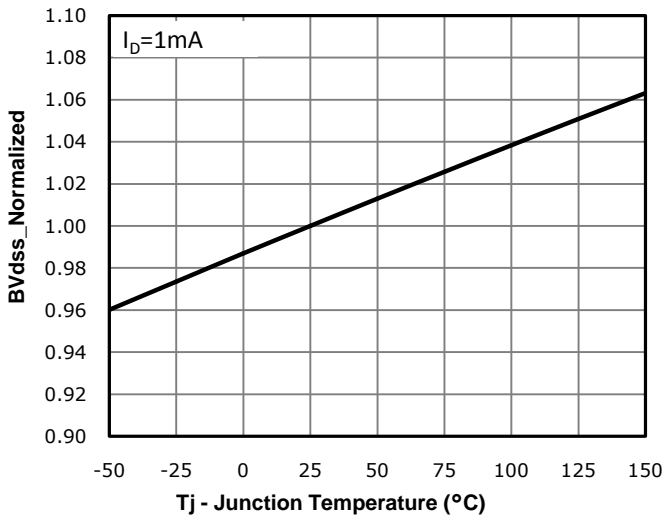


Fig 8: Capacitance Characteristics

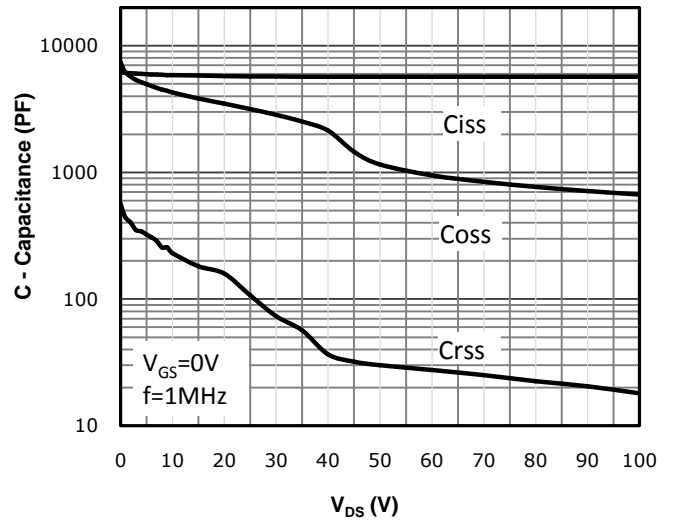


Fig 9: Gate Charge Characteristics

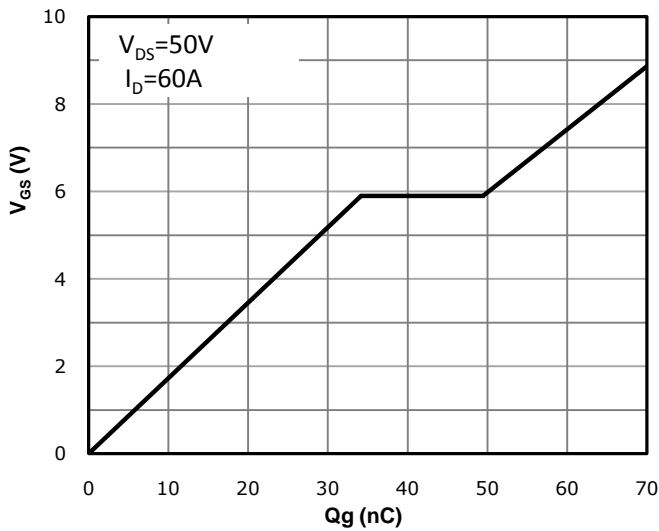


Fig 10: Body-diode Forward Characteristics

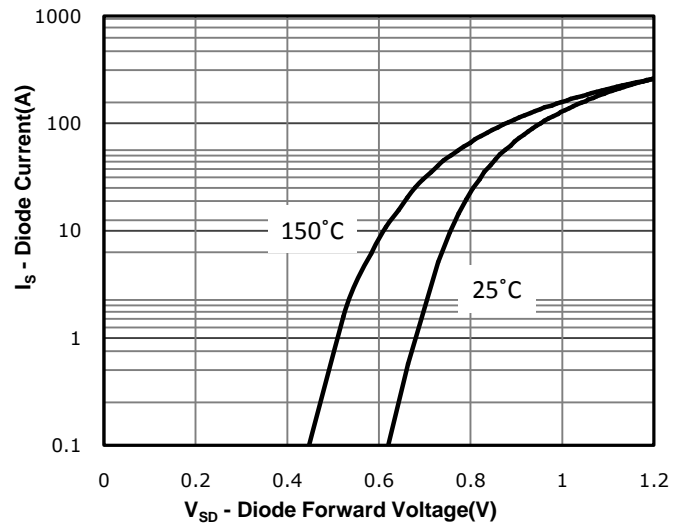


Fig 11: Power Dissipation

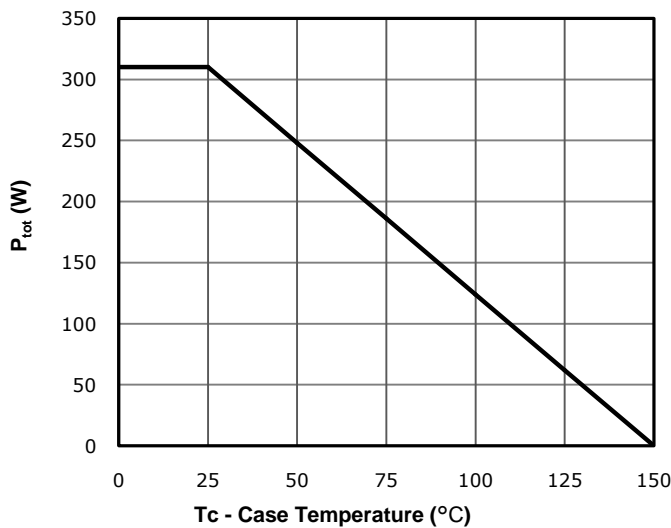


Fig 12: Drain Current Derating

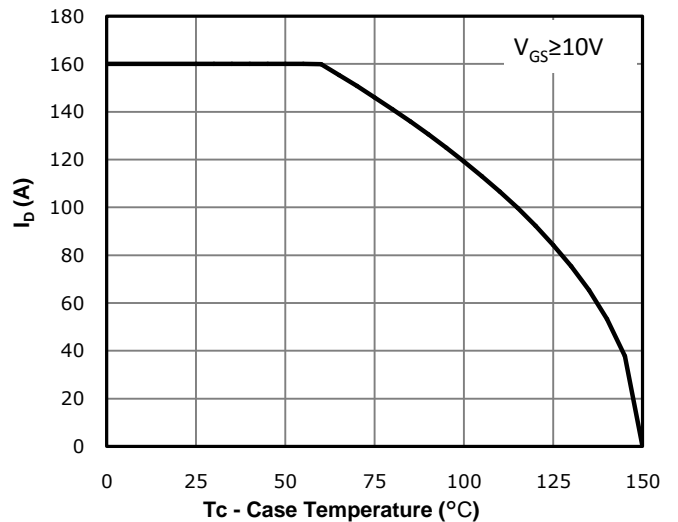


Fig 13: Safe Operating Area




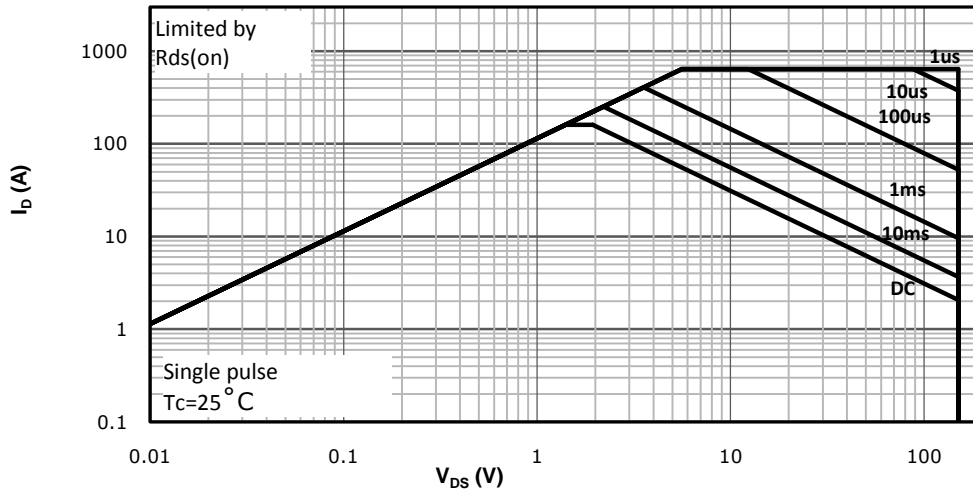


Fig 14: Max. Transient Thermal Impedance

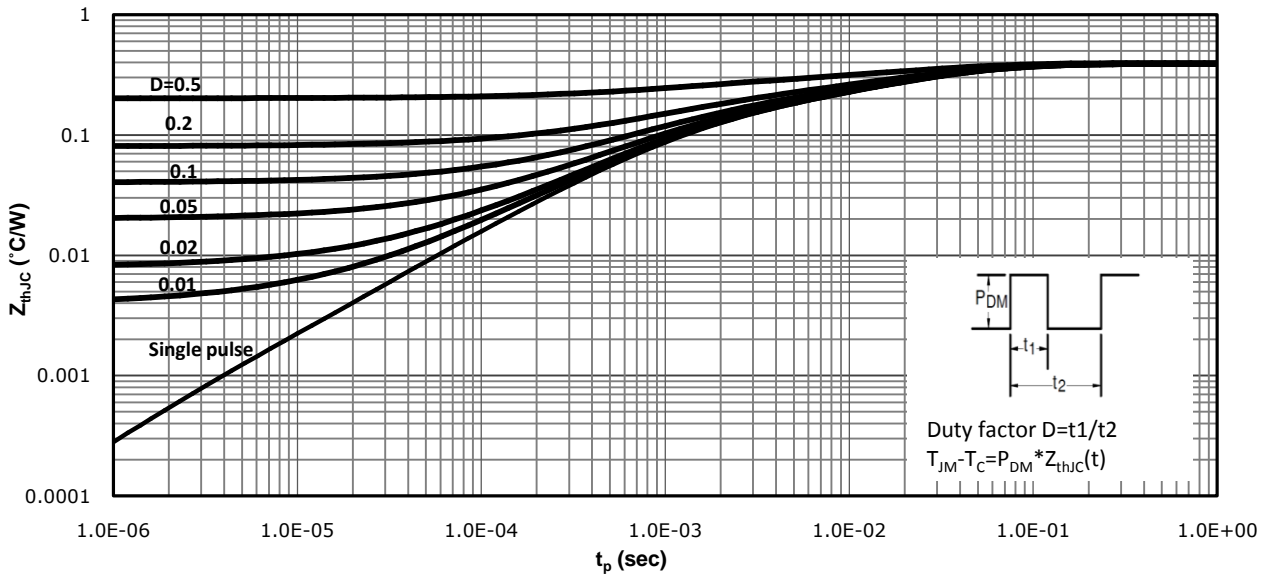
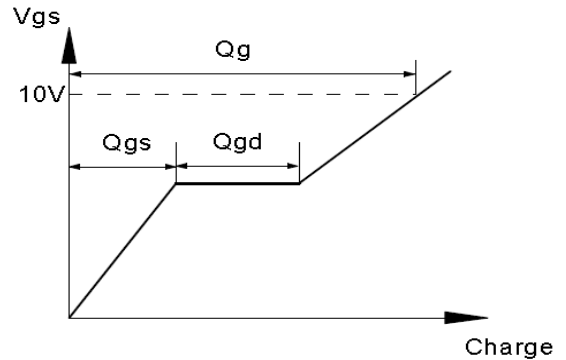


**Test Circuit & Waveform**



Gate Charge Test Circuit & Waveform

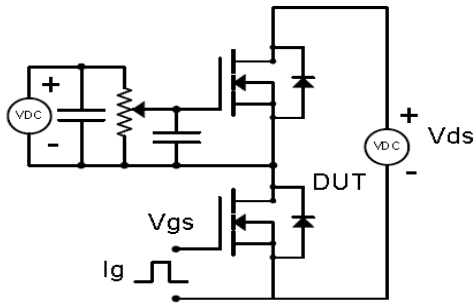



Resistive Switching Test Circuit & Waveforms

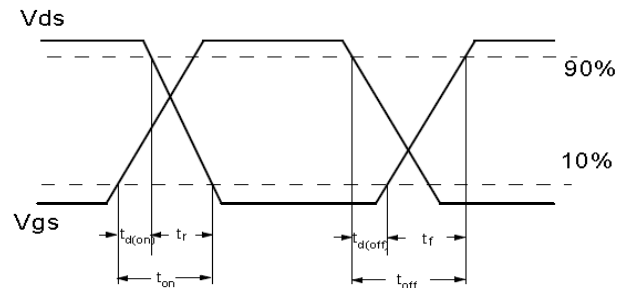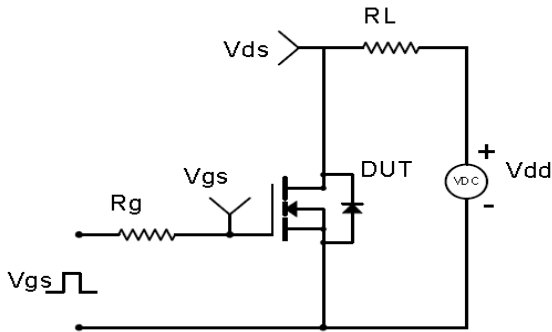


Unclamped Inductive Switching (UIS) Test Circuit & Waveforms

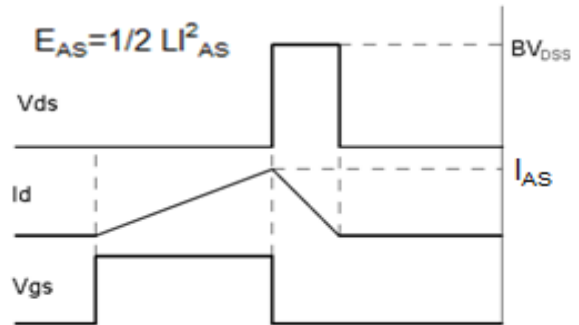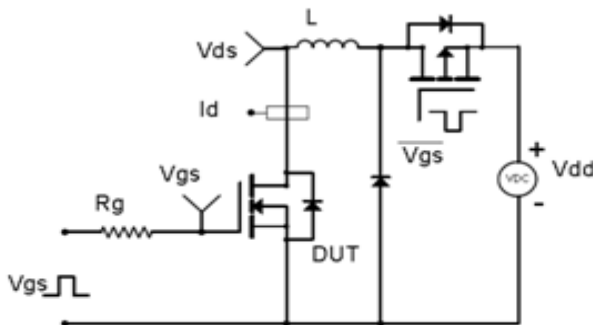

Diode Recovery Test Circuit & Waveforms

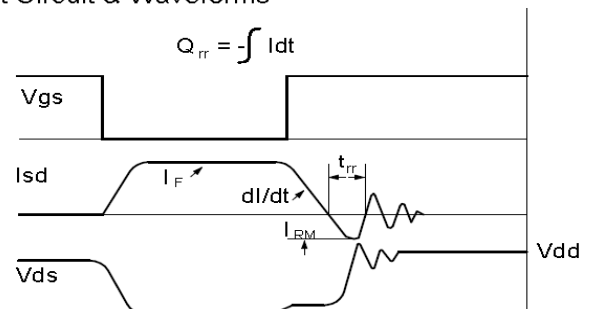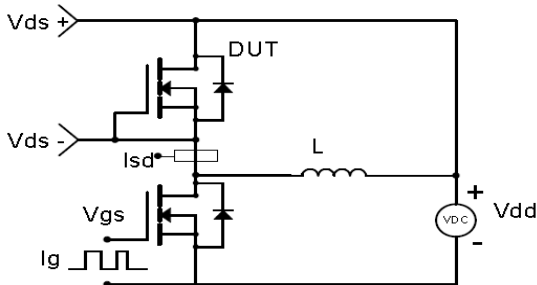

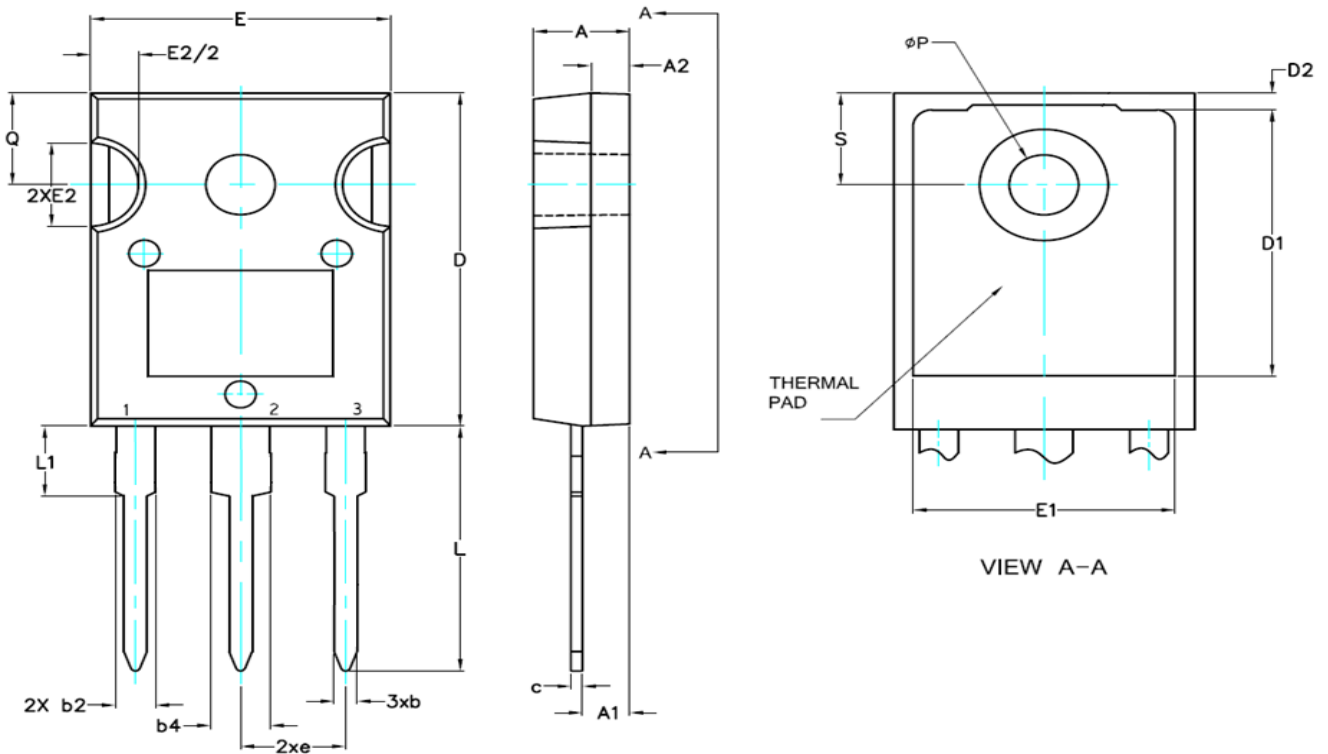**Package Outline: TO-247 Type T**


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	4.70	5.30	0.185	0.209
A1	2.20	2.60	0.087	0.102
A2	1.50	2.49	0.059	0.098
b	0.99	1.40	0.039	0.055
b2	1.65	2.41	0.065	0.095
b4	2.59	3.43	0.102	0.135
c	0.38	0.89	0.015	0.035
D	19.70	20.70	0.776	0.815
D1	13.08	--	0.515	--
D2	0.51	1.40	0.020	0.055
e	5.45 BSC		0.215 BSC	
E	15.29	16.00	0.602	0.630
E1	13.40	--	0.528	--
E2	4.50	5.49	0.177	0.216
L	14.20	16.10	0.559	0.634
L1	3.70	4.50	0.146	0.177
Q	5.25	6.25	0.207	0.246
P	3.50	3.70	0.138	0.146
S	5.51 BSC		0.217 BSC	

## Revision History

Revision	Date	Major changes
1.0	2023/6/25	Release formal version.

## Disclaimer

Unless otherwise specified in the datasheet, the product is designed and qualified as a standard commercial product and is not intended for use in applications that require extraordinary levels of quality and reliability, such as automotive, aviation/aerospace and life-support devices or systems.

Any and all semiconductor products have certain probability to fail or malfunction, which may result in personal injury, death or property damage. Customer are solely responsible for providing adequate safe measures when design their systems.

CRM(CQ) reserves the right to improve product design, function and reliability without notice.